



Configuration A left




Configuration A right

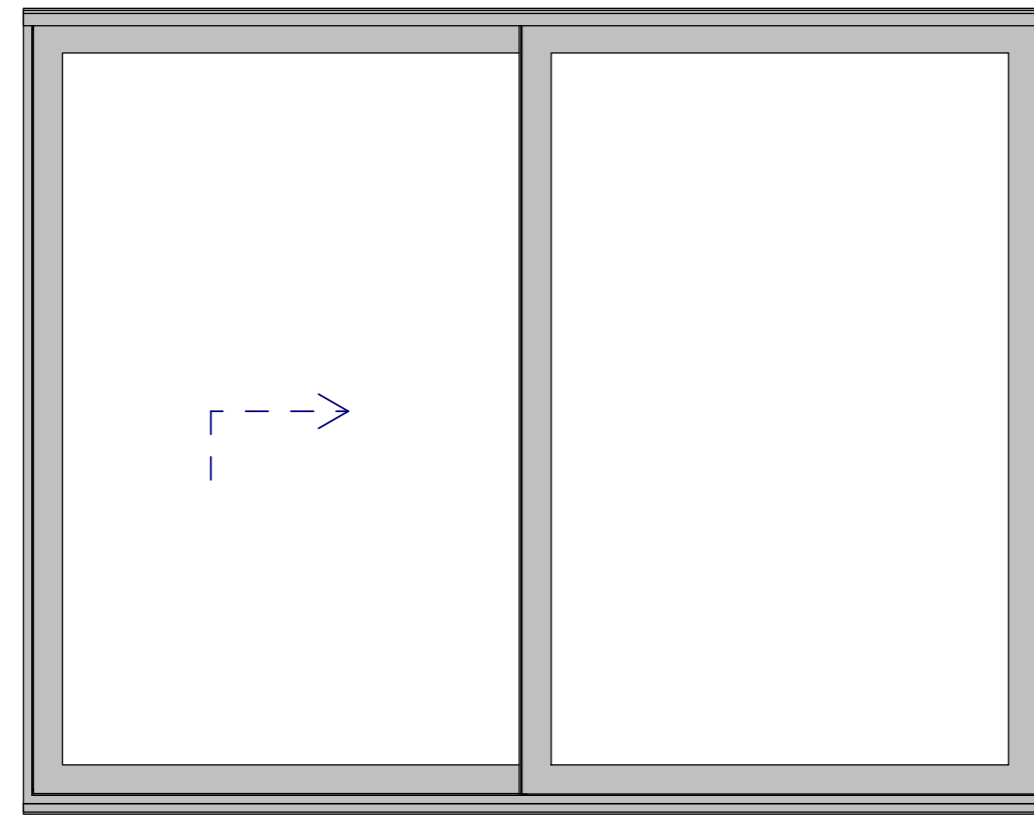


Configuration C

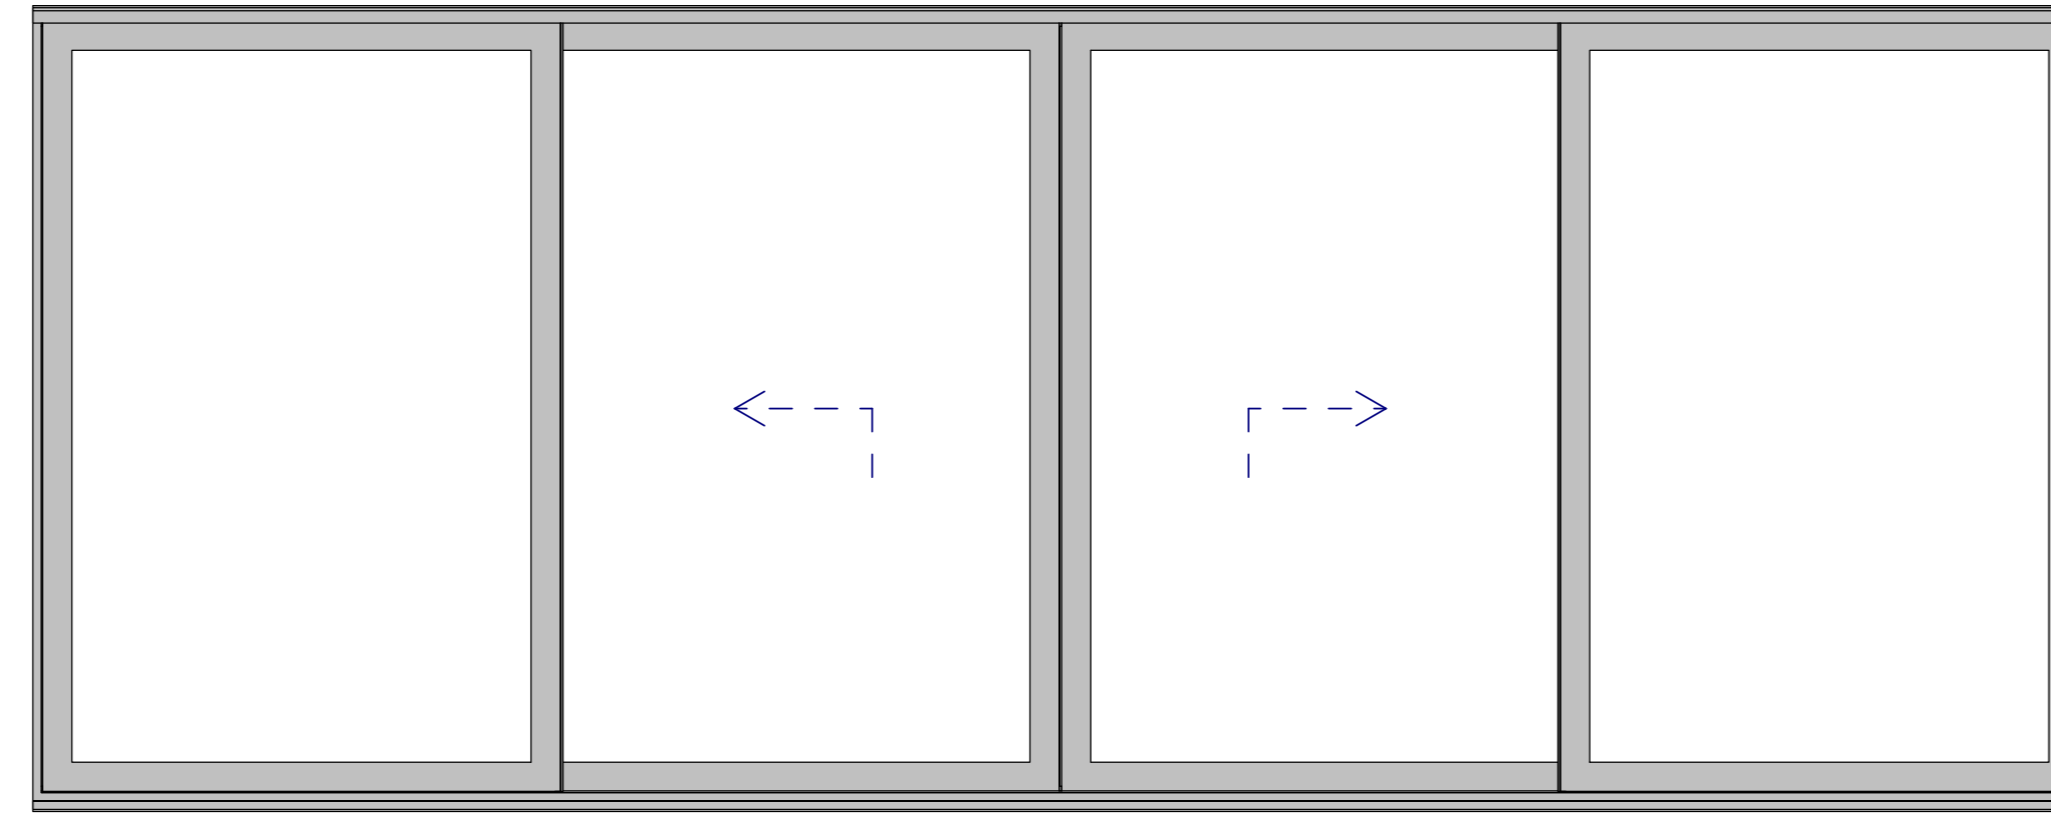


Configuration D left

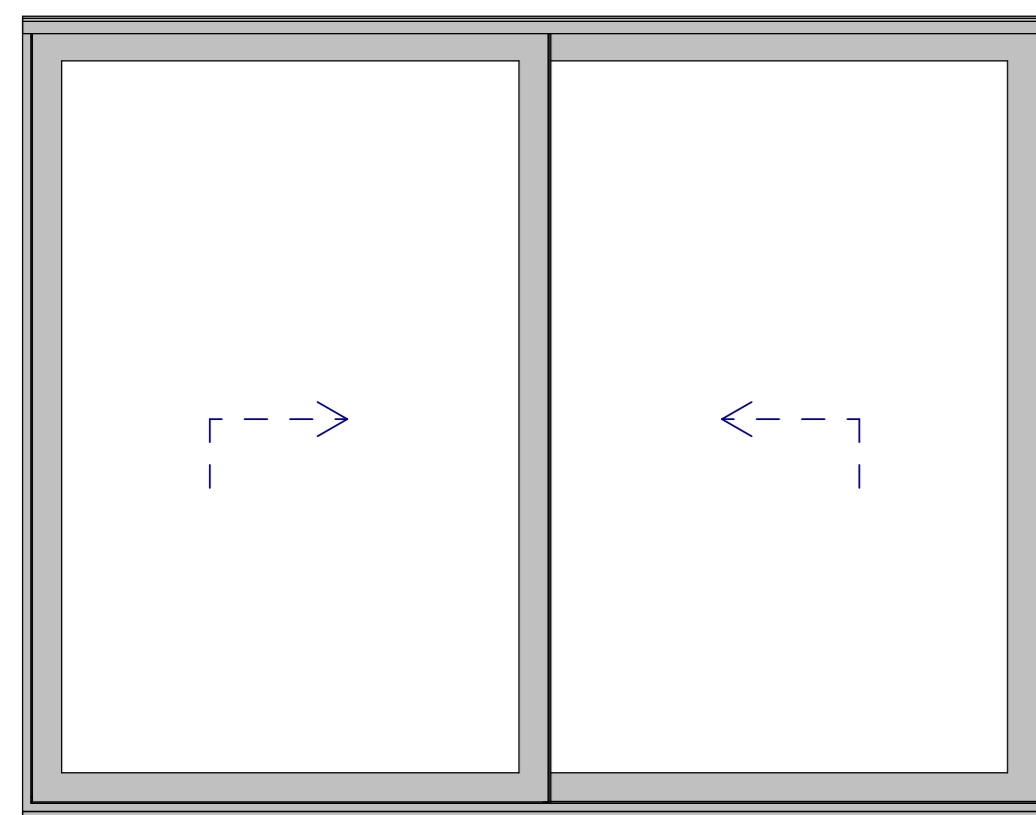


Configuration D right

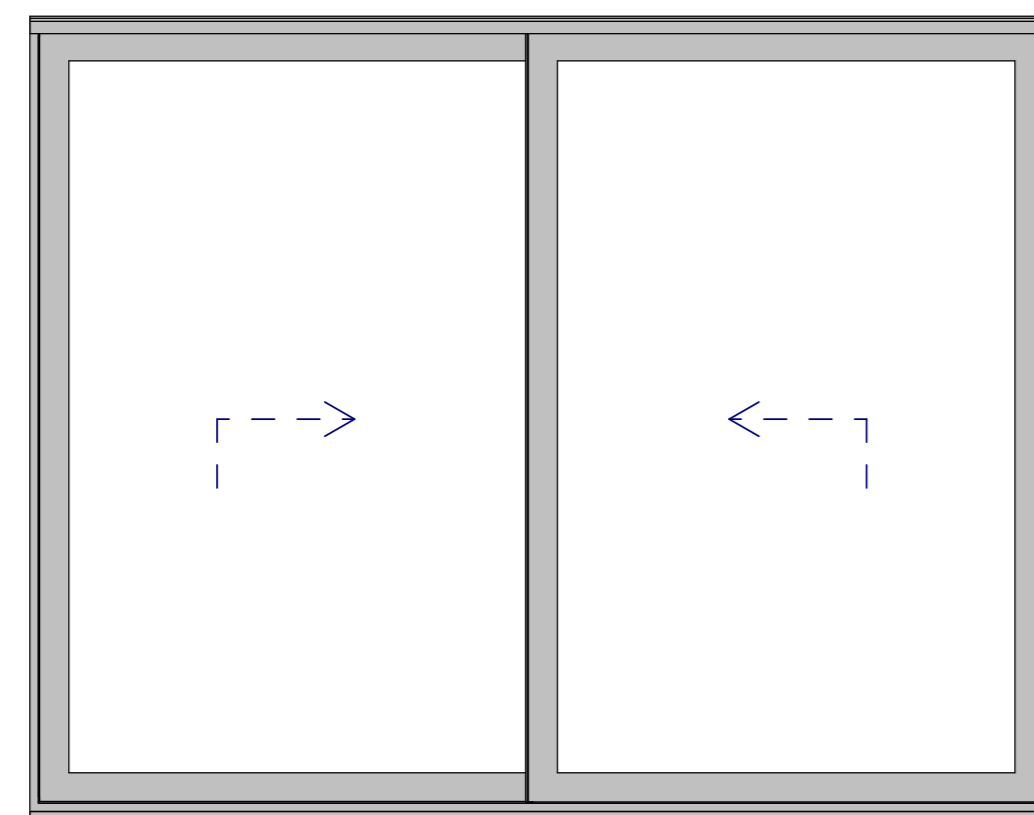

Configuration F

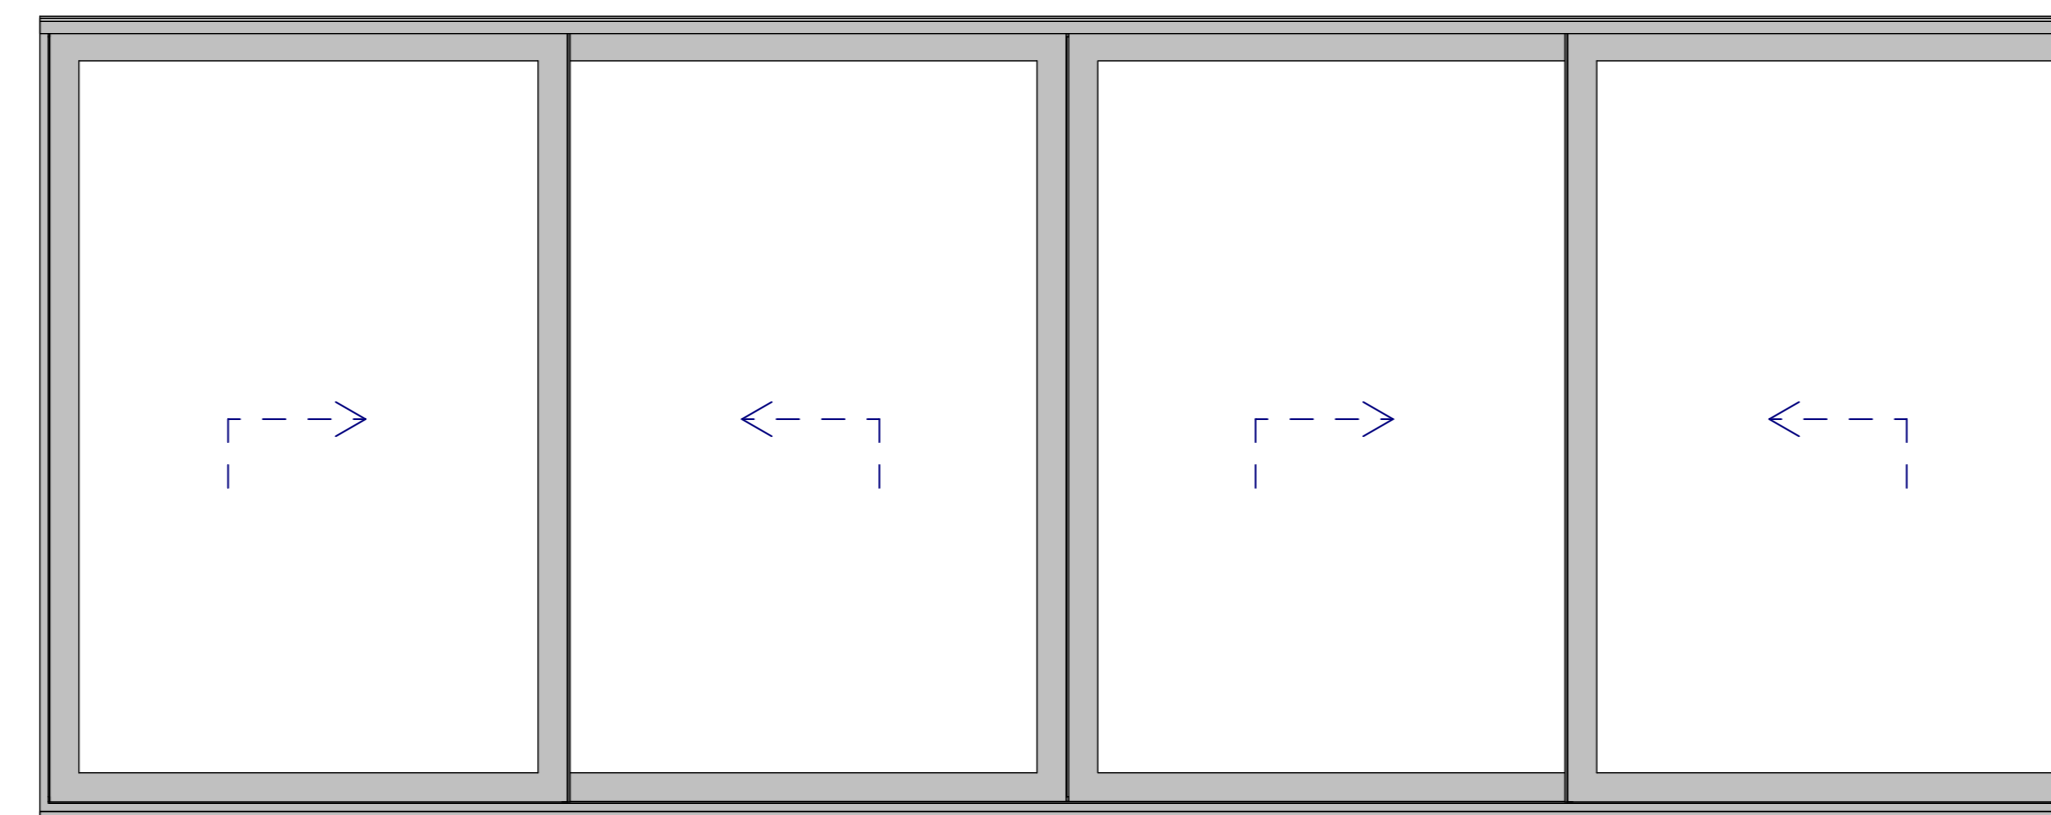


Configuration K

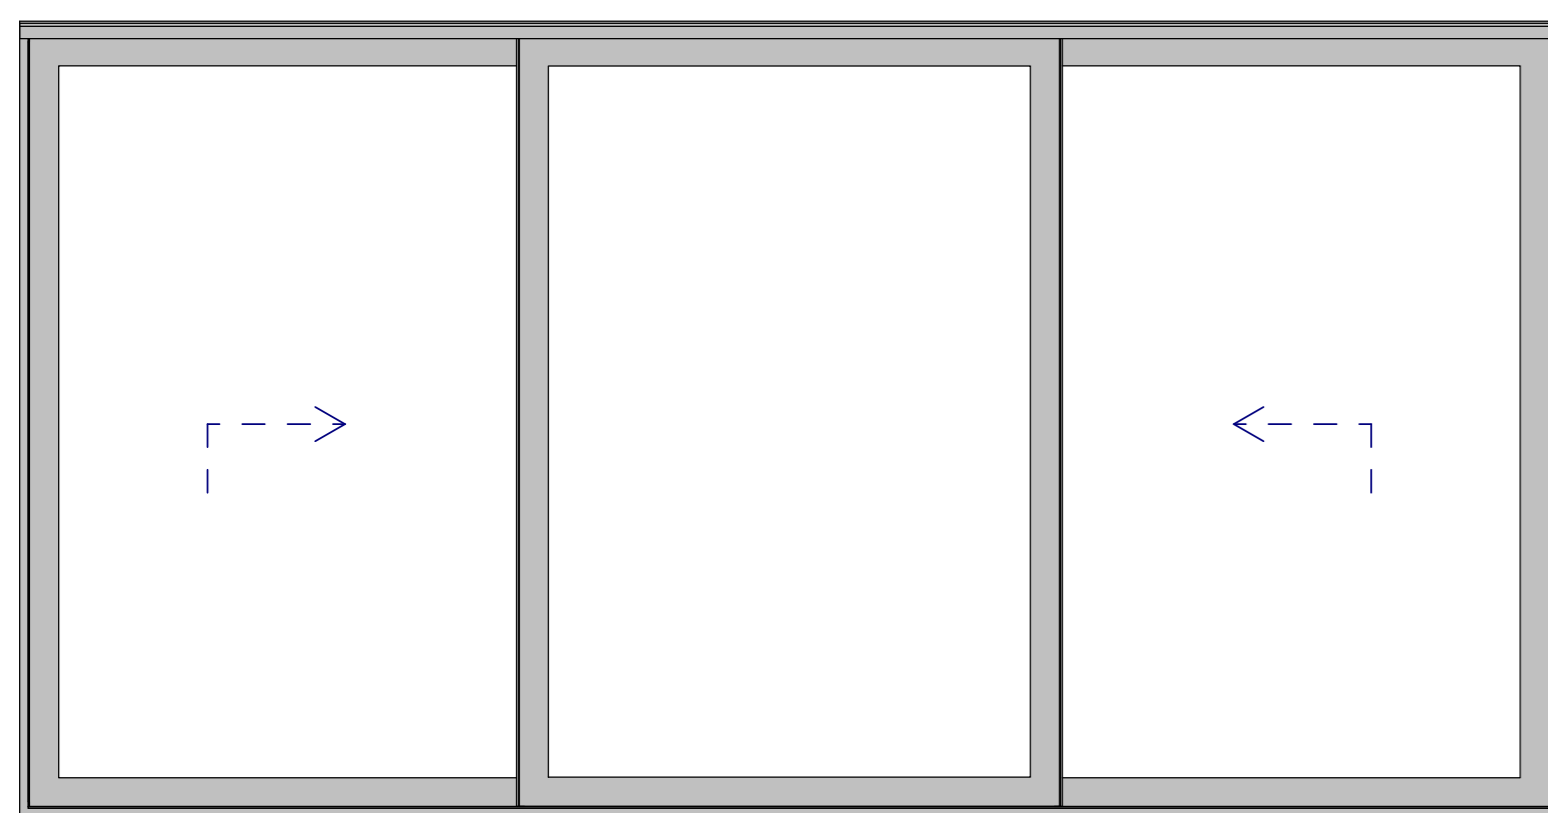

Zulassungen / Prüfungen
 Authorisations / Tests

Windlastwiderstand nach EN 12210 Wind load resistance in accordance with EN 12210	Klasse C2 Class C2
Schlagregendichtheit nach EN 12208 Watertightness in accordance with EN 12208	Klasse 6A Class 6A
Schalldämmung nach EN ISO 10140 Sound insulation in accordance with EN ISO 10140	bis Rw 39 dB to Rw 39 dB
Wärmedurchgangskoeffizient nach EN ISO 10077-2 Thermal insulation in accordance with EN ISO 10077-2	Uf = 1,8 W / (m²K) Uf = 1.8 W / (m²K)
Luftdurchlässigkeit nach EN 12207 Air permeability in accordance with EN 12207	Klasse 4 Class 4

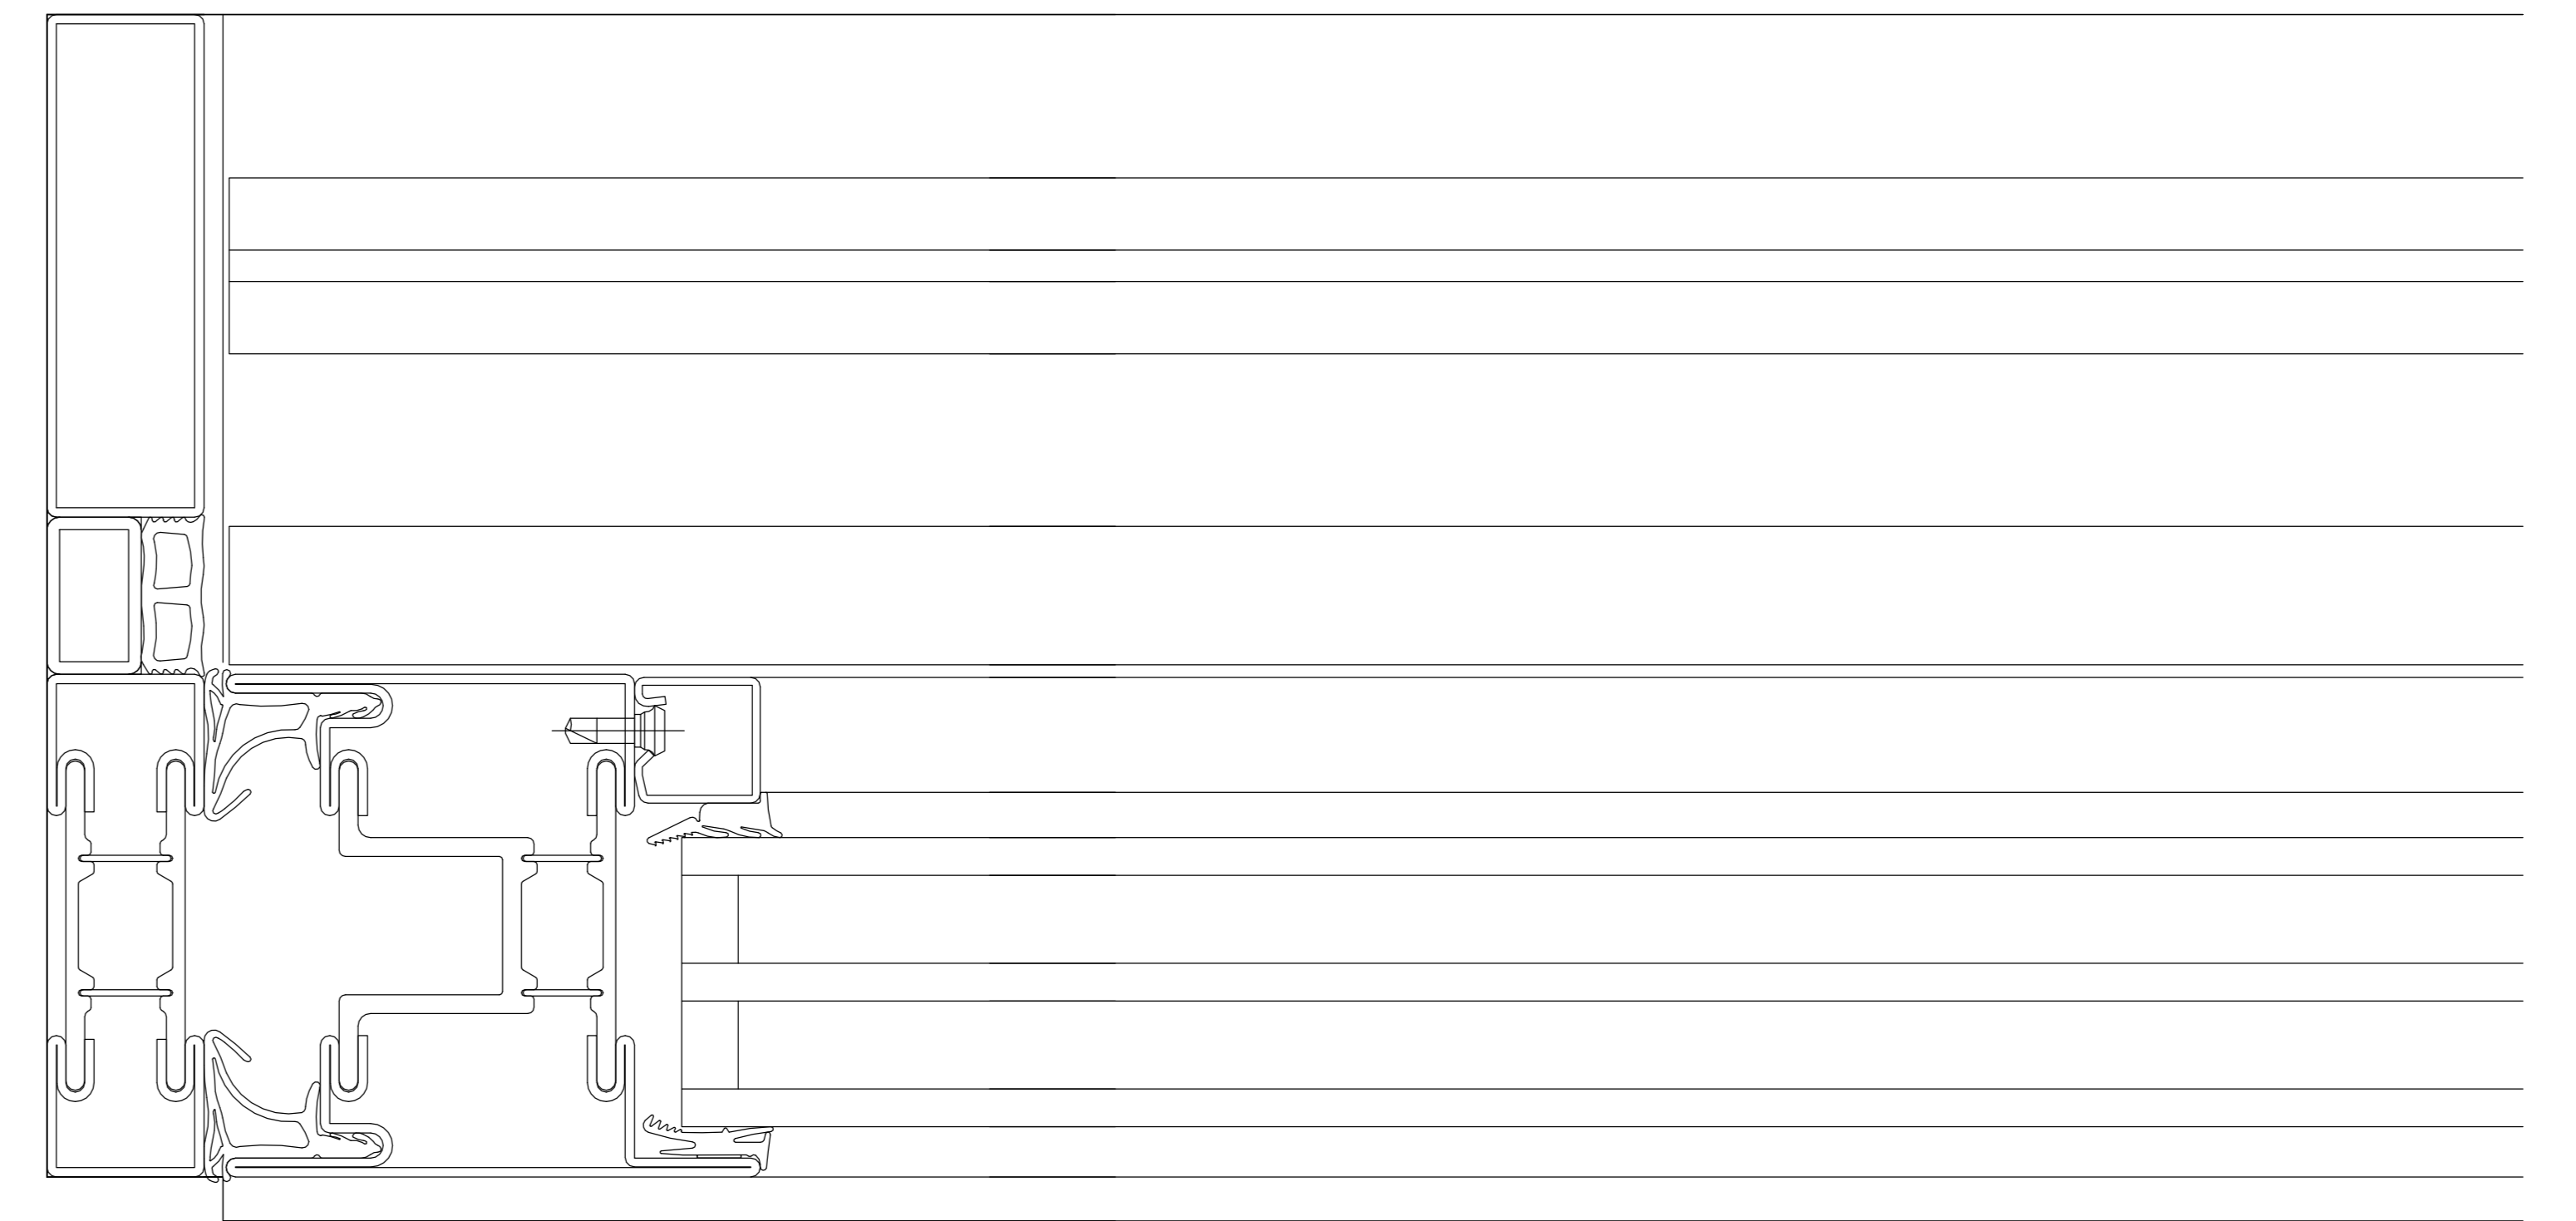

Elementbeispiele Unit examples	- R
	-
Jansen Janisol lift-and-slide Door	